

# Composite Air Drill

Compact, Light-Weight and Ergonomic

# Air Impact Wrench Series

1-1/2" for super heavy duty and bridge construction

3251



3/8" Composite Air Drill

Free Speed	2,000 RPM
Horse Power	0.5HP / 373W
Chuck Size	3/8" (10mm)
Speed Reducer	2 gear, caged
Ave. Air Consumption	4CFM (113.3 L/min)
Length	181mm (7.1in.)
Net Weight	0.8kg [1.8lbs.]
Air Inlet	1/4"
Air Pressure	90PSI [6.3kg/cm <sup>2</sup> ]


3252



3/8" Composite Air Drill

Free Speed	2,800 RPM
Horse Power	0.5HP / 373W
Chuck Size	3/8" (10mm)
Speed Reducer	2 gear, caged
Ave. Air Consumption	4CFM (113.3 L/min)
Length	181mm (7.1in.)
Net Weight	0.8kg [1.8lbs.]
Air Inlet	1/4"
Air Pressure	90PSI [6.3kg/cm <sup>2</sup> ]

6000

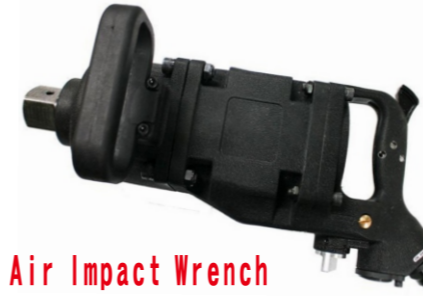

1-1/2" Air Impact Wrench

Free Speed	3,000 RPM
Clutch	Twin Hammer
Working Torque (5s)	3,600Ft-lbs. (4,878Nm)
Max. Torque (15s)	4,000Ft-lbs. (5,420Nm)
Bolt Capacity	3-5/16" (85mm)
Ave. Air Consumption	11.2CFM (317.2 L/min)
Length	450mm (17.7in.)
Net Weight	17kg [37.5lbs.]
Air Inlet	1/2"
Air Pressure	90-115PSI [6.3-8kg/cm <sup>2</sup> ]

6001



1-1/2" Air Impact Wrench

Free Speed	2,600 RPM
Clutch	Twin Hammer
Working Torque (5s)	3,200Ft-lbs. (4,336Nm)
Max. Torque (15s)	3,600Ft-lbs. (4,878Nm)
Bolt Capacity	3-1/8" (80mm)
Ave. Air Consumption	9CFM (255 L/min)
Length	435mm (17.1in.)
Net Weight	17.7kg [39.0lbs.]
Air Inlet	1/2"
Air Pressure	90-115PSI [6.3-8kg/cm <sup>2</sup> ]

3253



3/8" Composite Air Drill

Free Speed	3,500 RPM
Horse Power	0.5HP / 373W
Chuck Size	3/8" (10mm)
Speed Reducer	2 gear, caged
Ave. Air Consumption	4CFM (113.3 L/min)
Length	181mm (7.1in.)
Net Weight	0.8kg [1.8lbs.]
Air Inlet	1/4"
Air Pressure	90PSI [6.3kg/cm <sup>2</sup> ]

3254



1/2" Composite Air Drill

Free Speed	500 RPM
Horse Power	0.5HP / 373W
Chuck Size	1/2" (13mm)
Speed Reducer	double, caged
Ave. Air Consumption	4CFM (113.3 L/min)
Length	230mm (9.1in.)
Net Weight	0.9kg [2.0lbs.]
Air Inlet	1/4"
Air Pressure	90PSI [6.3kg/cm <sup>2</sup> ]

6002



1-1/2" Air Impact Wrench

Free Speed	3,500 RPM
Clutch	Twin Hammer
Working Torque (5s)	3,000Ft-lbs. (4,065Nm)
Max. Torque (15s)	3,200Ft-lbs. (4,336Nm)
Bolt Capacity	2-9/16" (65mm)
Ave. Air Consumption	8.7CFM (246.4 L/min)
Length	420mm (16.5in.)
Net Weight	16.3kg [36.2lbs.]
Air Inlet	1/2"
Air Pressure	90-115PSI [6.3-8kg/cm <sup>2</sup> ]

61006L



1" Air Impact Wrench  
6" Extended

Free Speed	3,500 RPM
Clutch	Twin Hammer
Working Torque (5s)	3,000Ft-lbs. (4,065Nm)
Max. Torque (15s)	3,200Ft-lbs. (4,336Nm)
Bolt Capacity	2-3/8" (60mm)
Ave. Air Consumption	8.7CFM (246.4 L/min)
Length	520mm (20.5in.)
Net Weight	17.3kg [38.4lbs.]
Air Inlet	1/2"
Air Pressure	90-115PSI [6.3-8kg/cm <sup>2</sup> ]